

# CONIBASE 2405

Crack-bridging waterproofing system (spray applied membrane)

## DESCRIPTION

**CONIBASE 2405** is a liquid applied, crack bridging covered membrane (ie with soil or gardens) waterproofing system based on advanced polymeric materials. It consists of a primer and a spray applied elastomeric polyurethane waterproofing membrane.

## RECOMMENDED FOR

**CONIBASE 2405** is intended for use on blinding slabs, walls and roofs of below ground or covered constructions that will protect the membrane from UV degradation. **CONIBASE 2405** is ideally suited to applications that require maximum crack bridging and fast installation.

## FEATURES AND BENEFITS

- **No 'pre-stripping' of existing cracks required**
- **Monolithic, no welds laps or seams**
- **Fast installation**
- **Easy and dependable detailing due to spray application of waterproofing membrane**

## SYSTEM BUILD UP

**CONIBASE 2405 is composed of:**

**Primer** depending on substrate.

**CONIPUR M 810** – a spray applied, 2 component, elastomeric, polyurethane, solvent and filler free, waterproofing membrane.

Primer	Depending on substrate	0.3 – 0.5kg/m <sup>2</sup>
Broadcastin g	Oven dried silica sand, (0.3-0.8mm)	0.8 – 1.0kg/m <sup>2</sup>
Membrane	Conipur M 810	1.6 – 2.1kg/m <sup>2</sup>

Total thickness approx. 2.0mm.

Consumption figures are a guide only and may be higher in rough or porous substrates.

## APPLICATION METHOD

For detailed, product specific application instructions, see individual product technical data sheets.

## MAINTENANCE


Regular cleaning and maintenance will prolong the life of all resin coatings, enhance the appearance and reduce the tendency to pick up dirt. Specialised floor cleaning equipment and chemicals are available and the suppliers are able to offer advice on appropriate cleaning regimes.

## PRECAUTIONS



Fully cured, Conipur products are considered non-hazardous materials. When handling Conipur products, avoid inhalation of vapours and contact with eyes, skin and clothing. Wear impervious gloves and eye protection. In case of eye contact, seek medical attention. When working with the products, do not eat, smoke or work near a naked flame.

For additional information concerning safety hazards, regulations regarding transport and waste management, please refer to the relevant Material Safety Data Sheet. The regulations of the local trade association and/or other authorities, regulating safety and hygiene of workers handling polyurethanes, isocyanates and epoxy resins must be observed. Keep packaging away from heat, flames and sources of ignition. Do not cut or weld on or near empty packaging. Refer to **Material Safety Data Sheets (MSDS)** of the individual products for further information

# CONIBASE 2405

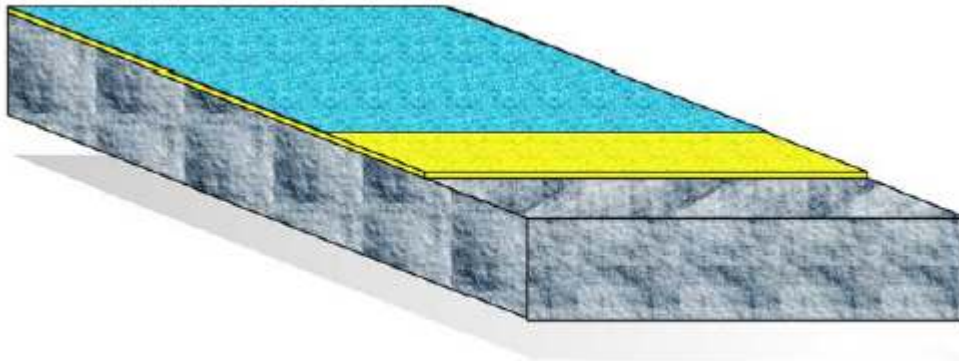

### Consumption

	Primer	According to substrate	
	Membrane	CONIPUR M 810, pigmented, PU, 2 component, solvent free, spray applied	1.6 – 2.1kg/m <sup>2</sup>
Total Thickness of System			Approx. 2mm

**A/Cbase2405/4/1011**

#### STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this **BASF** publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

#### NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by **BASF** either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not **BASF**, are responsible for carrying out procedures appropriate to a specific application.

**BASF Australia Ltd**  
A.B.N. 62008437867  
Head Office: 11 Stanton Road Seven Hills, NSW 2147  
Ph. (02) 8811 4200

Newcastle	(02) 4961 3819
Canberra	(02) 6280 6010
Brisbane	(07) 3633 9900
Townsville	(07) 4774 7344
Melbourne	(03) 9549 0300

Adelaide	(08) 8139 7500
Perth	(08) 9366 2600
Darwin	(08) 8984 3269
Kalgoorlie	0417 772 355

**BASF New Zealand Ltd**  
**BASF WEB SITES**

Head Office: 45 William Pickering Drive, Albany, Auckland Ph: (09) 414 7233  
[www.basf-cc.com.au](http://www.basf-cc.com.au)    [www.basf-cc.co.nz](http://www.basf-cc.co.nz)    [www.meyco.basf.com](http://www.meyco.basf.com)