

CONIROOF 2162

Covered roof crack-bridging waterproofing system (hand applied membrane)

DESCRIPTION

CONIROOF 2162 is a liquid applied, crack bridging covered roof (ie with pavers or gardens) waterproofing system based on advanced polymeric materials. It consists of a primer and a hand applied elastomeric polyurethane waterproofing membrane.

RECOMMENDED FOR

CONIROOF 2162 is intended for use on roofs that will be subsequently covered with pavers or gardens.

FEATURES AND BENEFITS

- no 'prestriping' of existing cracks required
- monolithic, no welds laps or seams

SYSTEM BUILD UP

CONIROOF 2162 is composed of:

Primer depending on substrate.

CONIPUR M 860/ M 860 Thix – a hand applied, 2 component, elastomeric, polyurethane, solvent and filler free, waterproofing membrane.

Primer Broadcasting	Depending on substrate	0.3 – 0.5kg/m ²
	Oven dried silica sand, (0.3-0.8mm)	0.8 – 1.0kg/m ²
Membrane	CONIPUR M 860	2.0 – 2.7kg/m ²
	CONIPUR M 860 Thix	1.5 – 2.1kg/m ²

Total thickness approx. 2.0mm

Consumption figures are a guide only and may be higher in rough or porous substrates

APPLICATION

For detailed, product specific application instructions, see individual product technical data sheets.

MAINTENANCE

Regular cleaning and maintenance will prolong the life of all resin coatings, enhance the appearance and reduce the tendency to pick up dirt. Specialised floor cleaning equipment and chemicals are available and the suppliers are able to offer advice on appropriate cleaning regimes.

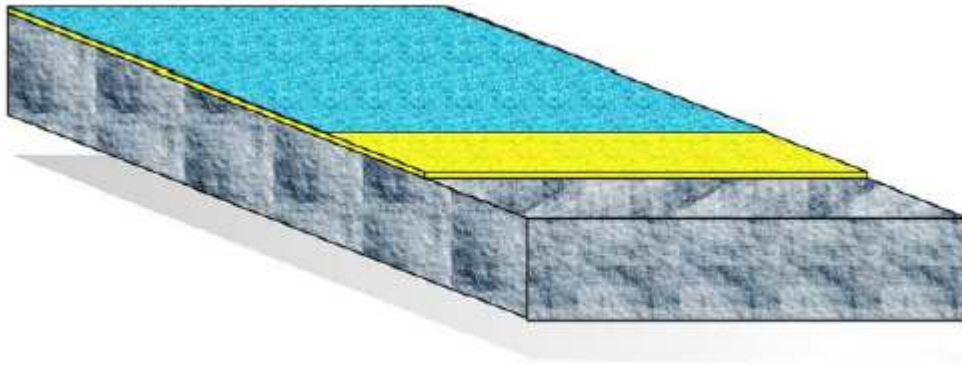
PRECAUTIONS



Fully cured, Conipur products are considered non-hazardous materials. When handling Conipur products, avoid inhalation of vapours and contact with eyes, skin and clothing. Wear impervious gloves and eye protection. In case of eye contact, seek medical attention. When working with the products, do not eat, smoke or work near a naked flame.

For additional information concerning safety hazards, regulations regarding transport and waste management, please refer to the relevant Material Safety Data Sheet. The regulations of the local trade association and/or other authorities, regulating safety and hygiene of workers handling polyurethanes, isocyanates and epoxy resins must be observed. Keep packaging away from heat, flames and sources of ignition. Do not cut or weld on or near empty packaging.

For the full health and safety hazard information and how to safely handle and use this product, please make sure that you obtain a copy of the BASF Construction Chemicals **Material Safety Data Sheet (MSDS)** of the individual products from our office or our website.

CONIROOF 2162



		Consumption
	Primer	According to substrate
	Membrane	CONIPUR M 860/(860 Thix), pigmented, PU, 2 component, solvent free, hand applied
Total Thickness of System		Approx. 2mm

A/Croof2162/7/1011

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this **BASF** publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by **BASF** either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not **BASF**, are responsible for carrying out procedures appropriate to a specific application.

BASF Australia Ltd
 A.B.N. 62008437867
 Head Office: 11 Stanton Road Seven Hills, NSW 2147
 Ph. (02) 8811 4200

Newcastle	(02) 4961 3819
Canberra	(02) 6280 6010
Brisbane	(07) 3633 9900
Townsville	(07) 4774 7344
Melbourne	(03) 9549 0300

Adelaide	(08) 8139 7500
Perth	(08) 9366 2600
Darwin	(08) 8984 3269
Kalgoorlie	0417 772 355

BASF New Zealand Ltd
BASF WEB SITES

Head Office: 45 William Pickering Drive, Albany, Auckland Ph: (09) 414 7233
www.basf-cc.com.au www.basf-cc.co.nz www.meyco.basf.com